

**Problem:**

Leaking door lite frame.

**Cause:**

Often caused by lack of overhang and direct sunlight, or the installation of a storm door.

**Solution:**

Add clear silicone caulking for additional air and water resistance.




For this application we recommend using:  
**Alex Plus: Clear All Purpose Acrylic Latex Caulk Plus Silicone 40 YR.**

DAP LABEL INSTRUCTIONS: "Apply in temperatures above 40°F. Do not apply when rain or freezing temps are forecast before full cure can occur."

Please note this silicone will go on white, but dry clear.

**ADD CLEAR SILICONE CAULKING HERE**

**RECOMMENDED OVERHANG**

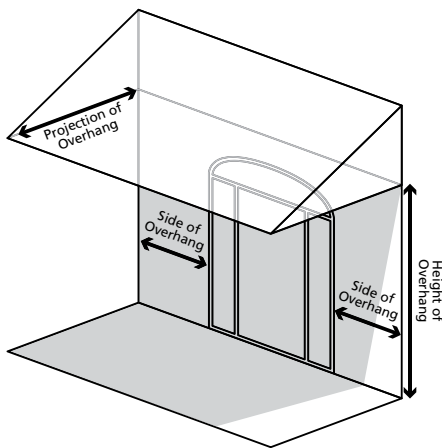

The "Projection of Overhang" must measure a minimum of 1/2 the height of the entryway. The "Side of Overhang" must measure a minimum of three feet from the outside edge of the door unit. The overhang must provide protection of the door unit from direct exposure to the elements.

