

# DOOR SOLUTIONS

## Problem:

Leaking door lite frame.


## Cause:

Often caused by lack of overhang and direct sunlight, or the installation of a storm door.

## Solution:

Add clear silicone caulking for additional air and water resistance.

### RECOMMENDED OVERHANG

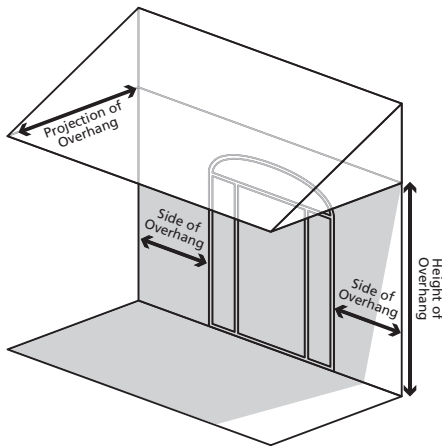

The "Projection of Overhang" must measure a minimum of 1/2 the height of the entryway. The "Side of Overhang" must measure a minimum of three feet from the outside edge of the door unit. The overhang must provide protection of the door unit from direct exposure to the elements.



For this application we recommend using:  
**Alex Plus: Clear All Purpose Acrylic Latex Caulk Plus Silicone 40 YR.**

DAP LABEL INSTRUCTIONS:  
"Apply in temperatures above 40°F. Do not apply when rain or freezing temps are forecast before full cure can occur."

Please note this silicone will go on white, but dry clear.

**ADD CLEAR SILICONE CAULKING HERE**

